



700N

Perimeter Seal Compatible with Parallel Arm Closers

PRODUCT CUT SHEET

PROJECT:
SUBMITTED BY:
DATE:
NOTES:

Material

Aluminum Alloy 6063, T5 Temper
Synthetic Rubber Polymer Blend: Chloroprene and EPDM
Neoprene is Black


- ▶ Very Good Abrasion Resistance, Tensile Strength and Memory
- ▶ Flame Resistant
- ▶ Moisture Resistant
- ▶ Temperature Range -20°F to 200°F
- ▶ Good Resistance to Ozone, Sunlight and Aging
- ▶ BHMA Certified to ANSI/BHMA A156.22 Performance Tests for Heat and Cold
- ▶ #No Break in Seal for Closer Mounting
- ▶ Closer and/or Overhead Holder Attach to Frame Through Weatherseal Section. Install Seal First
- ▶ Allows Mounting of Rim Exit Device Strikes Without Notching Gasketing
- ▶ Head Section Not Drilled
- ▶ Jamb Sections Furnished With Slotted Holes for Adjustment
- ▶ Self Drilling #8 (Tek Type) Screws Furnished
- ▶ May Be Cut to Fit Narrow Frame Stops
- ▶ Specify "Cut to Width" on Order

Finishes

700N Mill Aluminum
700NA Anodized Aluminum
700NB Gold
700NDKB Dark Bronze

Options

FATT - Fast Attach Tape

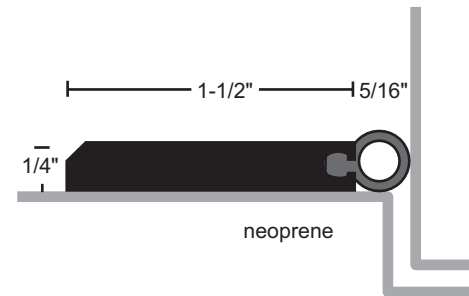

NGP-GKT-700N-PCS-1120-A